



Waikato Semi-Automatic Detacher

Designed to Benefit any Milking Operation

Simplicity is the key to reliable operation. The Waikato Semi-Automatic Detacher is so simple it works every time.

The vacuum operated system allows for fast and smooth removal of the milker claw.



*** Shown with optional Stanchion Kit**




Waikato

Semi-Automatic Detacher System

Complete Milkout

When the flow of milk entering the sensor drops to approximately 1/2 pound per minute, it must drain through a pilot hole which causes the float to remain up for 20 to 30 seconds. This delay at the end of milk ensures complete milkout.




Easy Operation

When the actuator lever is in the takeoff position, and no milk is in the sensor, vacuum is turned off to the claw and the cylinder cord is retracted.

To start milking, move the lever to the "Start of Milk" position. This manually opens vacuum to the claw and releases the cylinder cord.

After the milker unit is attached to the cow and milk flow has started, shift the lever back to the "Takeoff" position. The unit will stay on and milk when there is enough milk in the sensor to hold the float up.

The Waikato Semi Automatic Detacher System comes complete with all the hardware to make the unit portable. When the unit is assembled, hang it from the milk line, vacuum line or on a cable for easy operation. By connecting the milk hose to the line - vacuum to operate the detacher is provided through a tee.

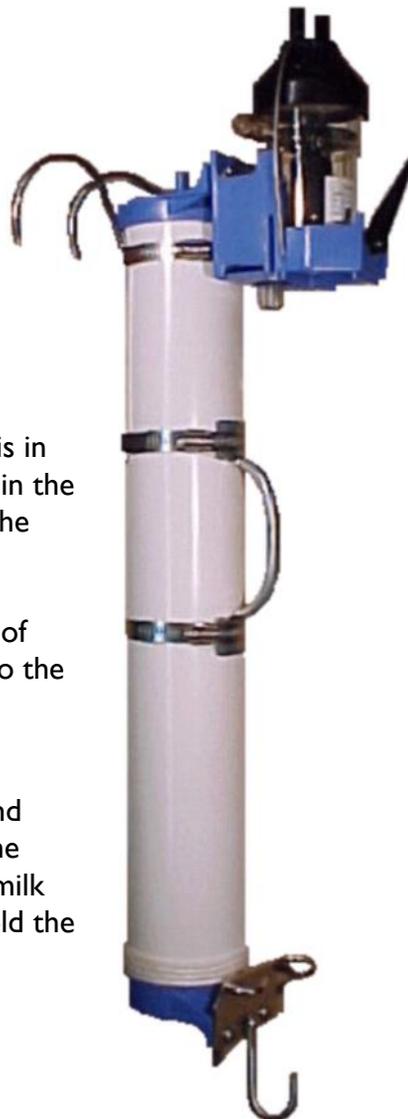

Part #94250
Waikato Semi-Automatic Detacher Complete (includes sensor and cylinder)

Part #32340NP
Stanchion Kit for Waikato Detacher

* Shown with optional Stanchion Kit

Models are also available for parlor installations. For more information, contact your local E-Zee NuPulse dealer or call 800-233-6878 to find a dealer in your area.



E-Zee NuPulse
4904 Triangle St. Suite A
McFarland, WI 53558 USA
Phone: 800-233-6878
Fax: 608-838-2221
Email: info@ezmilking.com
Website: www.ezmilking.com